
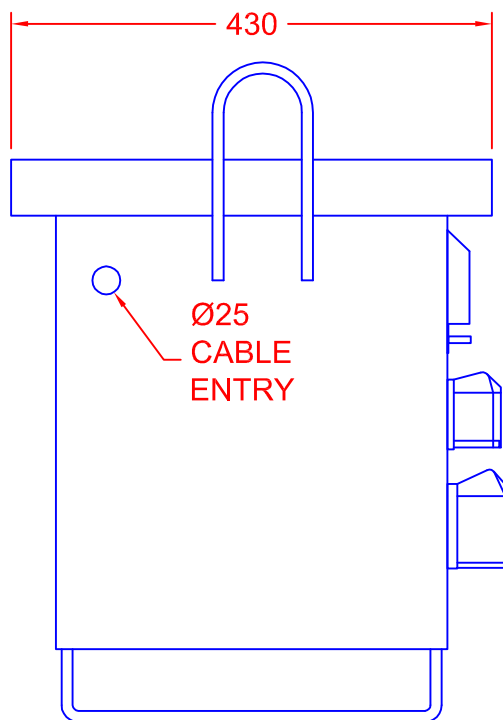


TOLERANCES (UNLESS SPECIFIED)	
0-10mm	±0.2mm
10.1-50mm	±0.5mm
50.1-250mm	±1.0mm
>250mm	±2.0mm

SITE BOX TRANSFORMER

TYPE 1 PHASE
 MODEL CM10K/16
 INPUT 230V
 OUTPUT 110V (55V-0-55V)
 CENTRE POINT EARTHED
 RATING 10kVA CONTINUOUS
 SOCKETS 4 OFF 16A (BS EN 60309)
 2 OFF 32A (BS EN 60309)
 PROTECTION
 INPUT 2 POLE 50A MCB
 OUTPUT 2 OFF 20A 2 POLE MCB
 2 OFF 32A 2 POLE MCB
 PAINTED STEEL ENCLOSURE
 RATED IP22
 COLOUR YELLOW

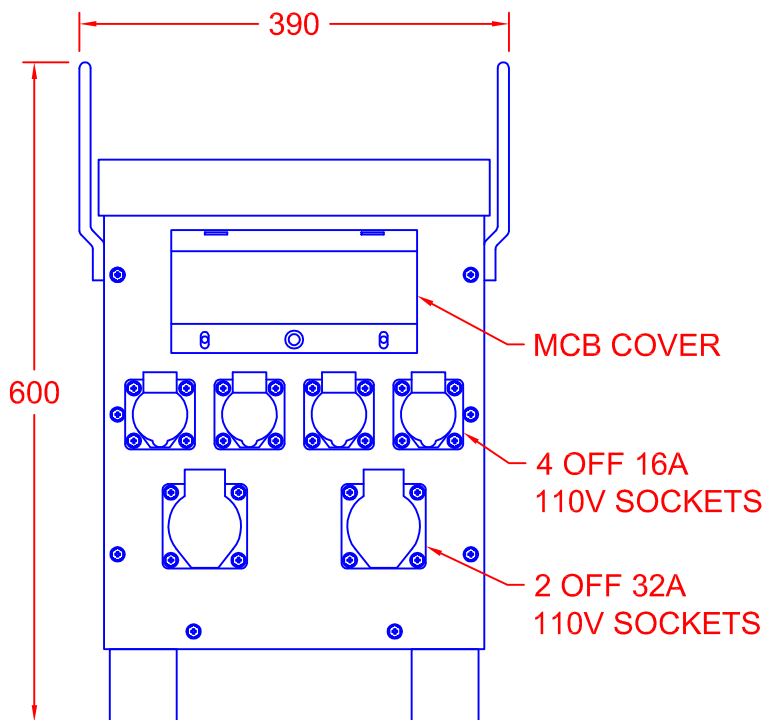

REV	
4	
3	
2	
1	

CARROLL & MEYNELL
 TRANSFORMERS LIMITED
 TEL: 01642 617406 FAX: 01642 614178
 enquiries@carroll-meynell.com

TITLE
 SITE BOX SUPPLY
 CMT10K16
 ALL DIMENSIONS IN mm

DRAWN	PROJECTION	DATE	SCALE
GB		29/05/08	NTS
DRAW No	REV	PAGE	
5134	0	1/1	